


DuraSystem® Mechanical actuator plate for WC A1 #
 WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000
 / WD5001..1000 / WD5001..1000

|< 217 mm >|

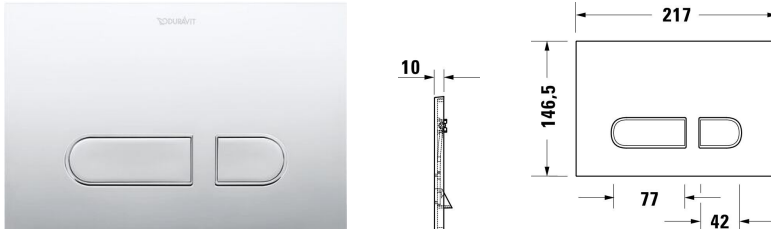

Mechanical actuator plate for WC A1	Dimension	Weight	Order number
Plastic, Dual Flush, Flush operation: Mechanical, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod			
Colors			
00 White Alpin 03 Black Matte 04 Brushed Bronze 10 Chrome 34 Polished Gold 70 Brushed Stainless Steel			
Variant			
	217x147 mm	0.300 kg	WD5001..1000
	217x147 mm	0.300 kg	WD5001..1000
	217x10 mm	0.313 kg	WD5001..1000
	217x147 mm	0.300 kg	WD5001..1000
	217x147 mm	0.200 kg	WD5001..1000
	217x147 mm	0.200 kg	WD5001..1000
Infobox			
For flush mounting (except for wet installation and units with shortened overall height), the mounting frame #WD6001 011 000 (white) or #WD6001 021 000 (high-gloss chrome) must be ordered			
Suitable products for			
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	0.999 kg	WD1011

DuraSystem® Mechanical actuator plate for WC A1 #
WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000
/ WD5001..1000 / WD5001..1000

|< 217 mm >|

Installation element dry installation for WC Odour extraction, Fan activation: Manual, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	17.5 kg	WD1012
Installation element wet installation for WC Type of installation: For walling in and out, Type of mounting: Wet installation, Max. projection toilet: 700 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow	445 x 153 mm	8.1 kg	WD1015
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	14 kg	WD1016
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	14 kg	WD1017
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	15 kg	WD1018
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l	500 x 155 mm	15 kg	WD1019

DuraSystem® Mechanical actuator plate for WC A1 #
 WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000
 / WD5001..1000 / WD5001..1000

|< 217 mm >|

Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l			500 x 155 mm	16 kg	WD1020
Installation accessories for ,					
Installation frame Type of installation: Flush-mounted			290 x 35 mm	0.3 kg	WD6001

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.